Reference 2000.6

ACOUSTIC & ELECTRICAL SPECIFICATIONS

- Nominal Impedance 8 ohms
- Max Amp Power 200 watts
- Frequency Response 35Hz – 20kHz
- Sensitivity 92 dB SPL, 1 watt @ 1 meter
- Crossover Frequency 3600Hz

SYSTEM COMPONENTS:

- Cabinet (Black Ash) 331046-001 (Not for sale)
  (Cherry) 331046-002 (Not for sale)
- Grille (Upper) 333204-001
  (Lower) 330976-001
- Low Frequency Transducer 6 1/2" (160mm) Co-injected woofer, shielded 330617-002
  DC Resistance 7.2 ohms ±10%
- High Frequency Transducer 1" (25mm) Neodymium Soft Dome 333232-001

SYSTEM COMPONENTS: (cont.)

DC Resistance 4.0 ohms ±10%

- Crossover Network 331103-003

AURAL SWEEP TEST SPECIFICATIONS:

- System Aural Sweep Test 6.0V Input 20 Hz to 20 kHz
- L.F. Aural Sweep Test 6.0V Input 20 Hz to 4kHz
- H.F. Aural Sweep Test 2.0V Input 3kHz to 20 kHz

PHYSICAL SPECIFICATIONS

- Enclosure dimensions: 40" x 7 1/2" x 14 3/8" (H x W x D) (1016 x 190 x 365mm)

SHIPPING WEIGHT:

- 40.4 lbs. (18.1 kg) Each

WARRANTY:

- Refer to Warranty Statement packed with each product.

PACKAGING

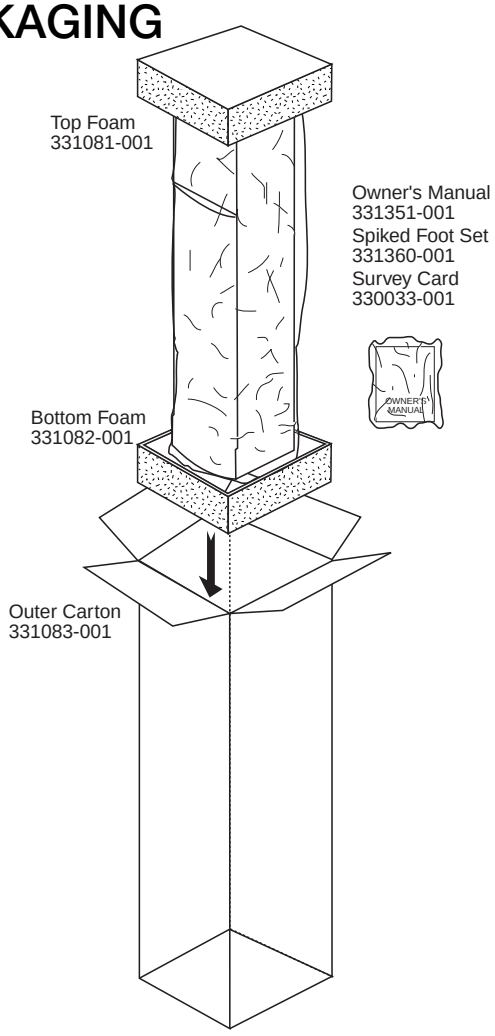

WIRING DIAGRAM

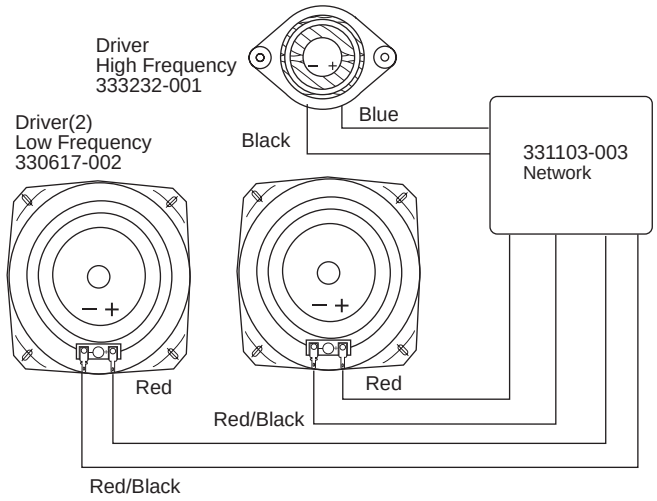

2000.6 SCHEMATIC

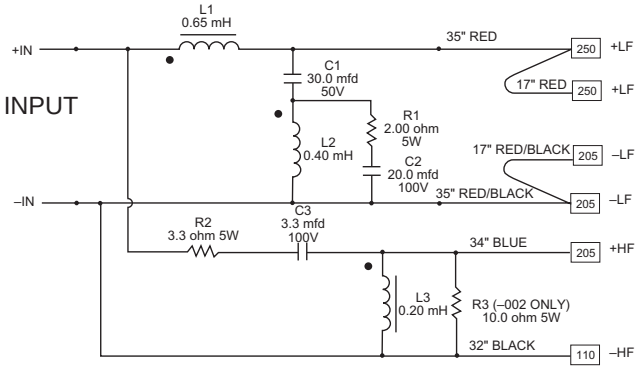

Reference 2000.6

Reference 2000.6

COMPONENT EXPLODED VIEW

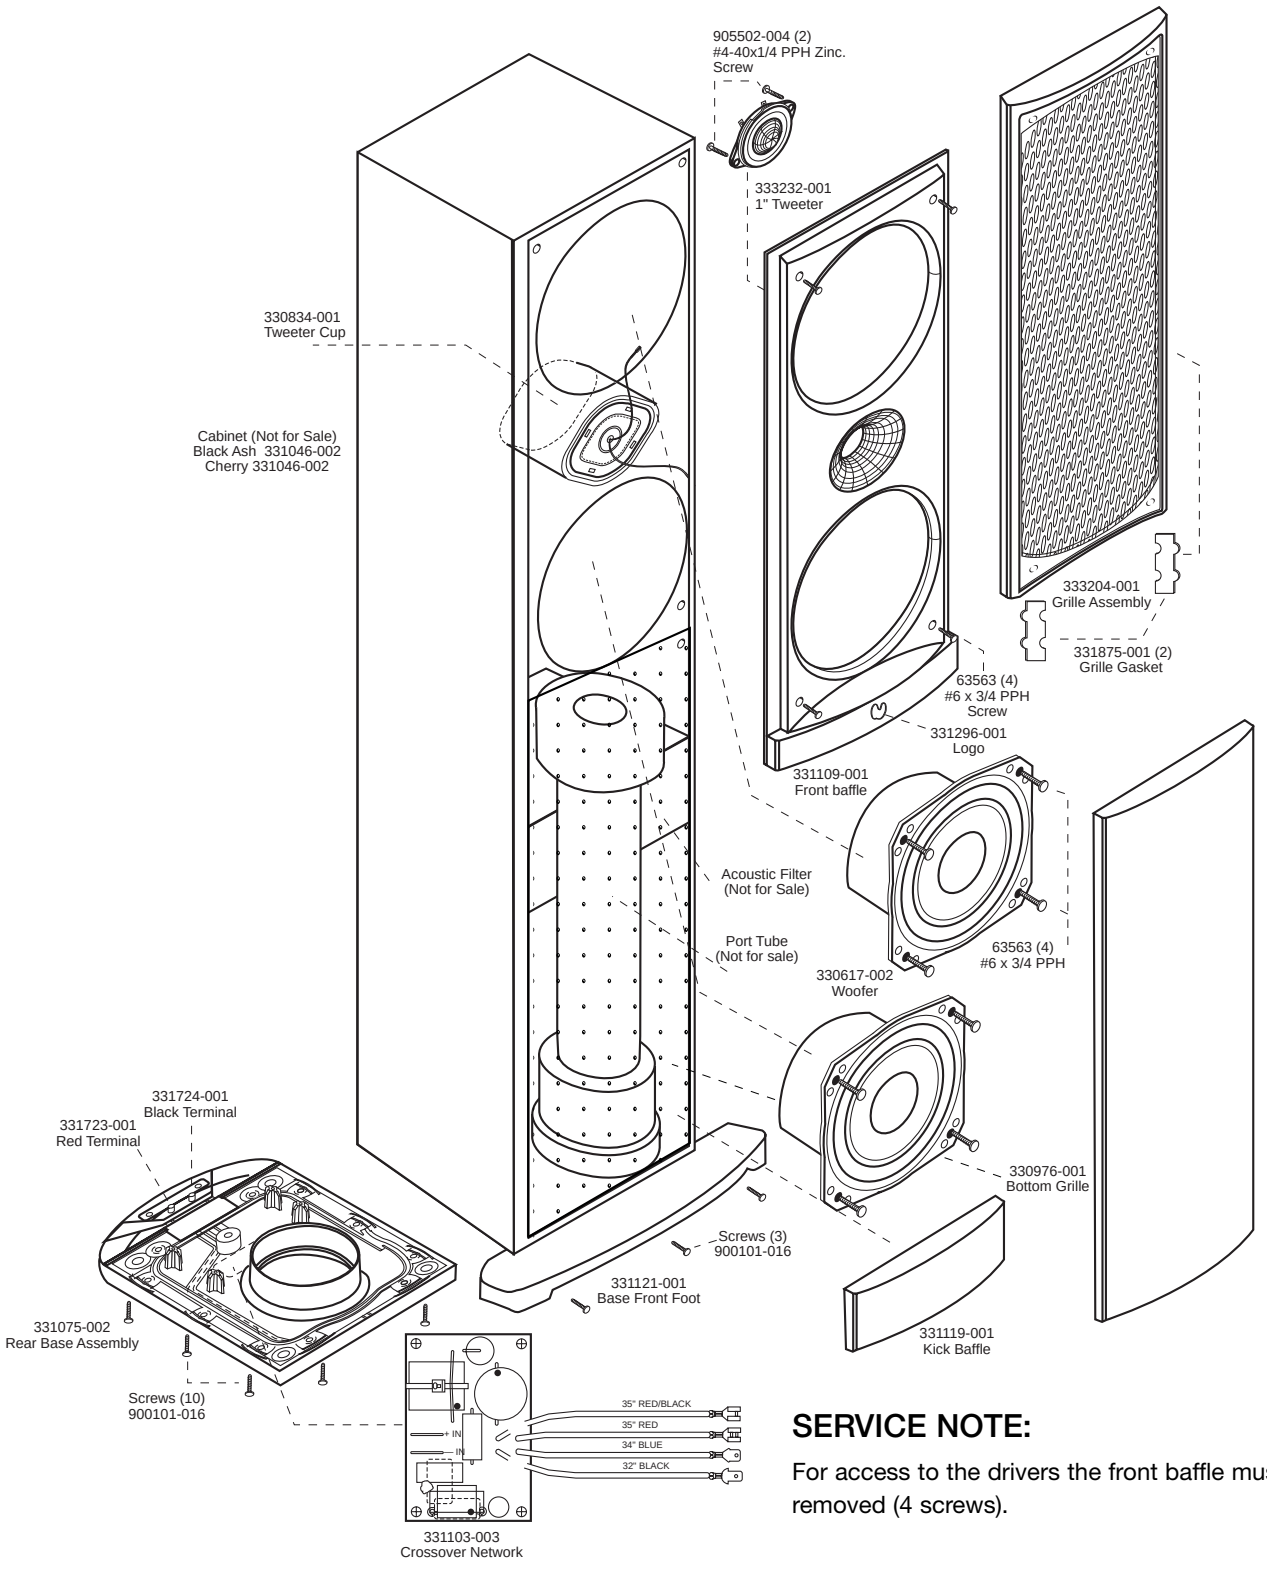

SERVICE NOTE:

For access to the drivers the front baffle must be removed (4 screws).